


JV080025

**Stainless Steel Body & Disc
PTFE Seated
Spring-Loaded
Check (Non-Return) Valve
Multi-Flange Wafer Type**

15mm - 80mm
PN6/10/16/25/40, ANSI150 & ANSI300
100mm
PN10/16/25/40, ANSI150 & ANSI300

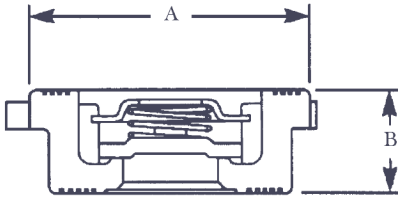

An economical spring-loaded non-return valve with a stainless steel body and disc.

It can be fitted in the horizontal position or in the vertical position with the flow going upwards.

Approvals, Features & Benefits

- Lightweight & economic
- Spring loaded
- Suitable for upward & horizontal flow
- Space saving

Pressure & Temperature

Pressure range:-
PN52 Rated

Temperature Range:-
0°C to 200°C

SIZE	15	20	25	32	40	50	65	80	100
A	43	48	58	68	75	94	113	129	159
B	17	20	22	28	32	40	46	50	60
Weight Kg	0.11	0.18	0.26	0.40	0.55	1.00	1.50	2.00	3.20

MATERIALS

Body	Stainless Steel (AISI 316)
Disc	Stainless Steel (AISI 316L)
Seat	Viton
Spring	Stainless Steel (AISI 316)