


## DCV2

**Stainless Steel Body & Disc  
Metal Seated  
Spring-Loaded  
Check (Non-Return) Valve  
Multi-Flange Wafer Type**

PN6/10/16/25/40, BST E\* & H, JIS 5\*\*/10/16/20

\* not suitable for DN65 - 80

\*\* not suitable for DN40 - 50 & DN80 - 100

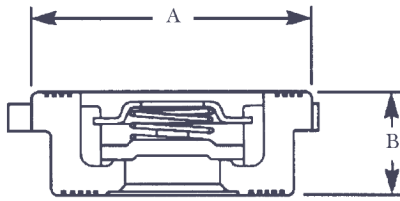

**spirax**  
**/sarco**

The Spirax Sarco DCV2 check (non-return) valve is suitable for use on a wide range of fluids for applications in process lines, hot water systems, steam and condensate systems etc.

It can be fitted in the horizontal position or in the vertical position with the flow going upwards.

### Approvals, Features & Benefits

- EN 558 part 1, series 49
- Robustly manufactured
- Spring loaded
- Suitable for upward & horizontal flow
- Space saving

### Pressure & Temperature

Pressure range:-  
PN40 Rated

Temperature Range:-  
0°C to 300°C

SIZE	15	20	25	32	40	50	65	80	100
<b>A</b>	43	53	63	75	85	95	115	133	154
<b>B</b>	16	19	22	28	31.5	40	46	50	60
<b>Weight Kg</b>	0.11	0.17	0.28	0.47	0.64	1.11	1.64	2.21	3.31

### MATERIALS

<b>Body</b>	Ferritic Stainless Steel (WS 1.4313)
<b>Disc</b>	Stainless Steel (316)
<b>Spring Retainer</b>	Stainless Steel (316)
<b>Spring</b>	Stainless Steel (316)