


JV081016

**Cast Iron (Epoxy Coated) Body
EPDM Seat
Dual Plate
Spring-Loaded
Check (Non-Return) Valve
Length A
Multi-Flange Wafer Type
PN10/16 & ANSI 150**

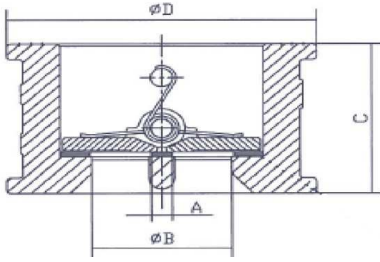

A WRAS approved epoxy coated cast iron, spring loaded dual plate check valve with stainless steel flaps and EPDM seats suitable for water applications.

Features, Benefits & Approvals

- WRAS approved
- Compact & lightweight
- Spring loaded plates
- Suitable for potable water applications

Pressure & Temperature

Maximum pressure:-
PN16 rated

Temperature range:-
-20°C to 110°C

| DN | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 |
|-----------|-----|-----|------|-----|------|------|------|------|------|
| A | 12 | 14 | 21.6 | 21 | 24.4 | 25.7 | 31 | 36 | 40.1 |
| B | 40 | 58 | 70 | 88 | 115 | 134 | 182 | 220 | 260 |
| C | 43 | 46 | 64 | 64 | 70 | 76 | 89 | 114 | 114 |
| D | 101 | 121 | 129 | 156 | 187 | 213 | 267 | 327 | 375 |
| Weight Kg | 1.5 | 2.0 | 3.0 | 4.5 | 7.0 | 9.0 | 14.0 | 23.0 | 35.0 |

MATERIALS

| | |
|--------|--------------------------|
| Body | Cast Iron (Epoxy Coated) |
| Flaps | Stainless Steel (316) |
| Seat | EPDM |
| Hinge | Stainless Steel (410) |
| Spring | Stainless Steel |