


STORM (SCUPPER) VALVES



4/5

ANGLED PATTERN STORM (SCUPPER) VALVES

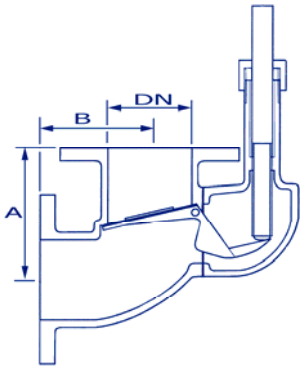

Part No. 4/5 Bronze Body With Or Without Closing Device

SIZE	DN40	DN50	DN65	DN80	DN100	DN125	DN150	DN200	DN250
A	162	162	154	143	168	305	305	489	650
B	103	103	110	108	133	156	168	203	250

Storm valves also known as scupper valves, are basically swing check valves which can be supplied with or without a closing device. They are used in sanitary discharge pipelines which have a ship-side exit, and prevent sea water entering the system during heavy sea.

Features & Benefits

- Classification society survey can be arranged
- 3.1 & 3.2 certificates available on request
- Optional open/shut indicators
- Flanged PN16 (others on request)

Pressure & Temperature

1 Bar @ 80°C

STANDARD MATERIALS		OPTIONAL MATERIALS (Others available on request)
Body/Bonnet	Bronze (LG2)	Bronze (LG4)
Disc	Bronze (LG2)	Bronze (LG4)
Stem	Manganese Bronze	
Flap	Rubber	Leather

Do you require class approved valves? Contact sales for availability.



ClassNK