



Super Centurion® 250 Fire Hydrant


Form 12921 – 04/14




Product Features

- 3-way hydrant: 250 psig (17 Barg) maximum working pressure, 500 psig (34 Barg) test pressure.
- UL Listed and FM Approved.
- Meets or exceeds all applicable requirements of ANSI/AWWA C502 Standard, UL 246 and FM 1510 specifications.
- O-ring sealed Bonnet, Ground, and Shoe Flange – better leak resistance, easier maintenance.
- O-ring sealed Oil Reservoir with Filler Plug – permits easy check of oil level and refill without removing Bonnet; filled at factory.
- Automatic lubrication – positive lubrication of stem threads and bearing surfaces each time hydrant is operated.
- Full flow performance – large radius hose and pumper openings and conical Upper Valve Plate reduce turbulence and provide low friction loss.
- Field replaceable, O-ring sealed Hose and Pumper Nozzles – threaded in place and retained by stainless steel locks – NST or BSP threads.
- O-ring sealed Bronze Seat Ring – Resists corrosion and easily removed for maintenance through top of hydrant.
- Safety Flange and stainless steel Safety Stem Coupling – if hydrant is hit by vehicle, flange breaks, coupling pulls free preventing damage to stem and main valve, and uncontrolled water flow – coupling will not break into pieces that could drop down and affect valve operation.
- Double Bronze Drains – each time main valve opens or closes, drain valves force-flush drain openings to keep them open for effective barrel drainage.
- Inlet Connections: 6" (DN150) Flanged ANSI B16.1 Class 125 Flat Face (optional PN10, PN16 drilling).
- Also available as: 3-hose, 4-hose, 3-hose & 1-pumper, 2-hose & 2-pumper configurations.

Dimensions

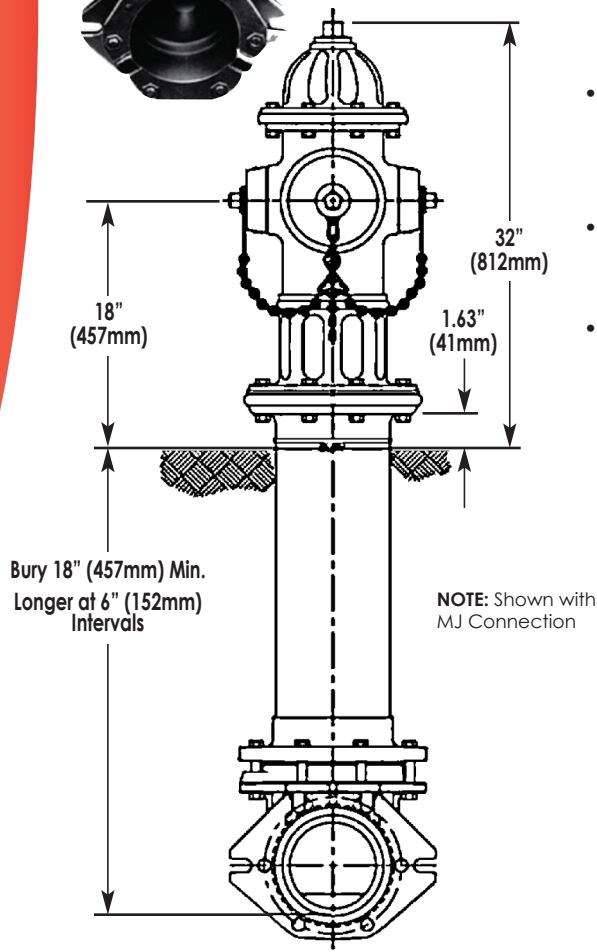

INTERNATIONAL DIVISION

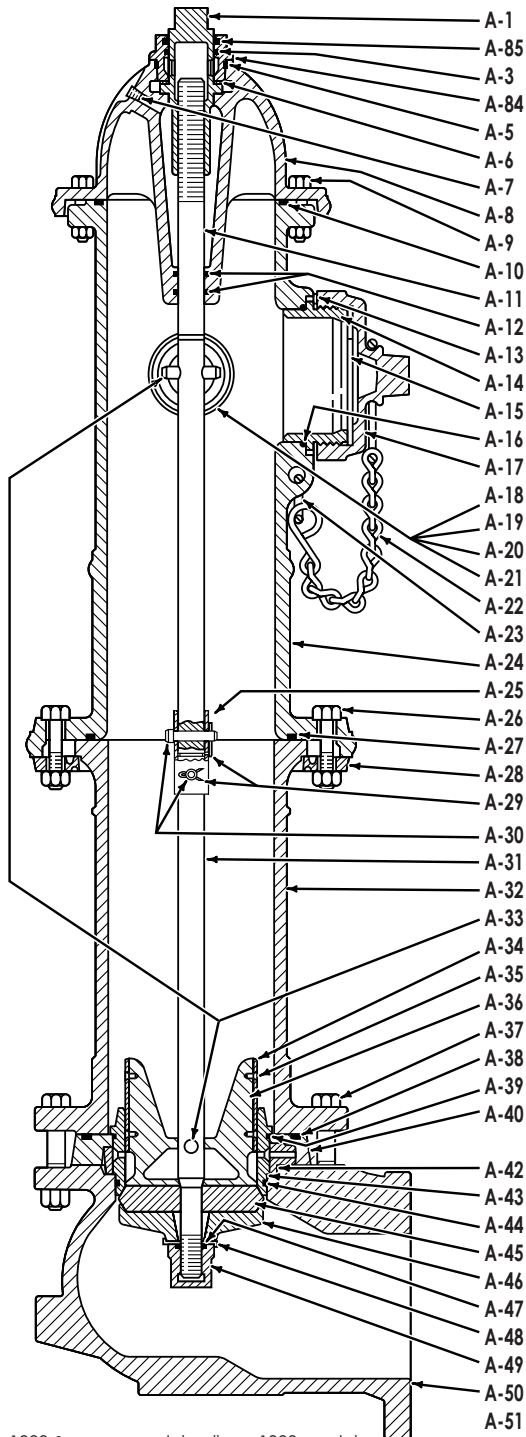

Parts List

ID	PART NAME	MATERIAL STANDARD
A-1 ¹	Operating Nut	Bronze ASTM B584
A-3	Hold Down Nut O-Ring	Rubber ASTM D2000 BUNA N
A-5	Bonnet O-Ring	Rubber ASTM D2000 BUNA N
A-6	Anti-Friction Washer	Acetal
A-7	Oil Plug	Brass ASTM B16
A-8	Bonnet	Cast Iron ASTM A126 CL.B
A-9	Bonnet Bolt & Nut	Steel ASTM A307 Plated
A-10	Upper Barrel O-Ring ²	Rubber ASTM D2000 BUNA N
A-11	Upper Stem	Steel ASTM A576 GR.B
A-12	Stem O-Ring	Rubber ASTM D2000 BUNA N
A-13	Nozzle Lock	Stainless Steel ASTM A276
A-14	Pumper Nozzle	Bronze ASTM B584
A-15	Pump. Noz. Cap Gasket	Rubber ASTM D2000 Neoprene
A-16	Pumper Nozzle O-Ring	Rubber ASTM D2000 BUNA N
A-17	Pumper Nozzle Cap	Cast Iron ASTM A126 CL.B
A-18	Hose Nozzle	Bronze ASTM B584
A-19	Hose Nozzle Gasket	Rubber ASTM D2000 Neoprene
A-20	Hose Nozzle O-Ring	Rubber ASTM D2000 BUNA N
A-21	Hose Nozzle Cap	Cast Iron ASTM A126 CL.B
A-22	Cap Chain	Steel Plated
A-23	Chain Hook	Steel Plated
A-24	Upper Barrel Less Nozzles	Cast Iron ASTM A126 CL.B
A-25	Safety Coupling	Stainless Steel ASTM A890
A-26	Safety Flange Bolt & Nut	Steel ASTM A307 Plated
A-27	Safety Flange O-Ring ³	Rubber ASTM D2000 BUNA N
A-28	Safety Flange	Cast Iron ASTM A126 CL.B
A-29	Cotter Pin	Stainless Steel ASTM A276
A-30	Clevis Pin	Stainless Steel ASTM A276
A-31	Lower Stem	Steel ASTM A576 Gr.B
A-32	Lower Barrel	Cast Iron ASTM A126 CL.B
A-33	Stem Pin	Stainless Steel ASTM A276
A-34	Drain Valve Facing	Plastic
A-35	Drain Valve Screw	Stainless Steel ASTM A276
A-36	Up. Valve Plate (A-34 & A-35)	Bronze ASTM B584
A-37	Shoe Bolt & Nut	Steel ASTM A307 Plated
A-38	Drain Ring Housing O-Ring ⁴	Rubber ASTM D2000 BUNA N
A-39	Seat Ring Top O-Ring	Rubber ASTM D2000 BUNA N
A-40	Drain Ring Housing	Cast Iron ASTM A126 CL.B
A-41	Drain Ring Hous. Nut & Bolt ⁵	Steel ASTM A307 Plated
A-42	Drain Ring	Bronze ASTM B584
A-43	Seat Ring	Bronze ASTM B584
A-44	Seat Ring Bottom O-Ring	Rubber ASTM D2000 BUNA N
A-45	Reversible Main Valve ⁶	Rubber ASTM D2000 SBR
A-46	Lower Valve Plate ⁷	Cast Iron ASTM A126 CL.B
A-47	Cap Nut Seal	Rubber ASTM D2000 BUNA N
A-48	Lock Washer	Stainless Steel ASTM A276
A-49	Lower Valve Plate Nut	Cast Iron ASTM A126 CL.B
A-50	Shoe ⁸	Cast Iron ASTM A126 CL.B
A-84 ¹	Hold Down Nut	Bronze ASTM B584
A-85 ¹	Weather Seal	Rubber ASTM D2000 EP
A-51	10.5 oz. Hydrant Lubricating Oil (not shown)	

- 1-1988 & newer models; all pre-1988 models use parts A-2 Weather Cap & A-4 Hold Down Nut. These parts are not shown & must be used with a pre-1988 style Operating Nut, A-1.
- 2-1997 & newer 3-way models; all pre-1997 models have flat gasket
- 3-1997 & newer models; all pre-1997 models have flat gasket
- 4-1997 & newer models; all pre-1997 models have square gasket
- 5-Not Shown; used only on pre-1997 model hydrant
- 6-1997 & newer models only; pre-1997 models use non-reversible main valve & lower valve plate - Not Shown
- 7-1997 & newer models for reversible main valve; pre-1997 models use non-reversible main valve - Not Shown
- 8-6" MJ Shoe is Ductile Iron, ASTM A536 Grade 65-45-12

Nozzle Information:

- 1/Pumper Nozzle (4.5"/DN110 NST or BSP)
- 2/Hose Nozzles (2.5"/DN65 NST or BSP)

Copyright © 2014 Mueller Co., LLC. All Rights Reserved. The trademarks, logos and service marks displayed in this document herein are the property of Mueller Co., LLC, its affiliates or other third parties. These products are intended for use in potable water applications. Please contact your Mueller Sales or Customer Service Representative concerning any other application(s).