


JV080021

**Stainless Steel Body & Disc
Metal Seat
Spring-Loaded
Check (Non-Return) Valve
Multi-Flange Wafer Type
PN10/16/25/40, ANSI150 & ANSI300**

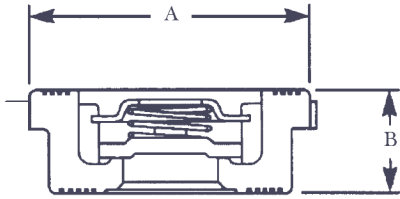

An economical spring-loaded non-return valve with a stainless steel body and disc.

It can be fitted in the horizontal position or in the vertical position with the flow going upwards.

Approvals, Features & Benefits

- Lightweight & economic
- Spring loaded
- Suitable for upward & horizontal flow
- Space saving

Pressure & Temperature

Pressure range:-
PN40 Rated

Temperature Range:-
0°C to 200°C

| DN | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 |
|------------------|------|------|------|------|------|------|------|------|------|
| A | 39 | 46 | 54 | 70 | 81 | 94 | 113 | 132 | 150 |
| B | 16 | 19 | 22 | 28 | 32 | 40 | 46 | 50 | 60 |
| Weight Kg | 0.10 | 0.14 | 0.22 | 0.39 | 0.54 | 0.77 | 1.25 | 1.90 | 2.80 |

MATERIALS

| | |
|----------------------------------|----------------------------|
| Body | Stainless Steel (CF8M) |
| Disc | Stainless Steel (CF8M) |
| Seat | Metal |
| Spring & Spring Cover | Stainless Steel (AISI 316) |